

Deep Cycle VRLA AGM Battery

VTD6-225

6V Voltage	225Ah Capacity	AGM Technology	Deep Cycle
----------------------	--------------------------	--------------------------	----------------------

The Valiant VTD series deep cycle AGM battery features special additives to the positive plate and advanced AGM separators which increase cycle life up to 70% higher compared with standard AGM batteries. This technology also provides up to 15 years of float life. The VTD series is highly suited for systems that rely heavily on battery storage power such as off-grid solar systems, RV and marine and electric vehicles.



COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T799	ISO9001
GB/T 19638	CE

GENERAL FEATURES


- Thicker plate with high Tin low Calcium alloy
- Deep discharge recovery, 1200cycle @ 50% DOD
- 2years full warranty in most applications
- Longer Service Life, in both Float or Cycling applications
- High Power Density

APPLICATIONS

- Off-grid solar systems
- RV and marine
- UPS/Telecom
- Electric vehicle
- Golf cart

DIMENSIONS & WEIGHT

Length(mm)	243 ± 1
Width(mm)	187 ± 1
Height(mm)	275 ± 1
Total Height(mm)	275 ± 1
Weight(kg)	30.5 ± 3%

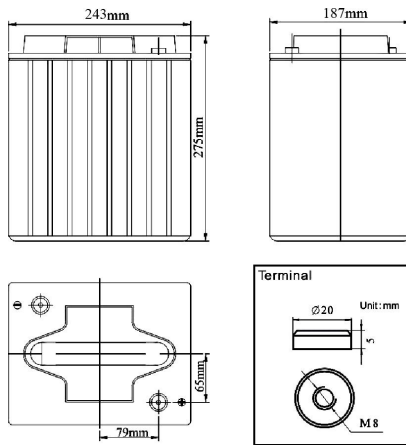

TECHNICAL

Nominal Voltage		6V(3 cells per unit)
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C (20 hour rate@11.25A,5.4V)		225Ah
Capacity @25°C	10hour rate (20.3A,5.4V)	203Ah
	5 hour rate (35.8A,5.25V)	179Ah
	1 hour rate (125.0A,4.8V)	125.0Ah
Internal Resistance	Full Charged Battery@25°C	≤2.8 mΩ
Ambient Temperature	Discharge	-15°C~45°C
	Charge	-15°C~45°C
	Storage	-15°C~45°C
Max.Discharge Current@25°C		1080A(5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 45A Voltage 6.8-6.9V
	Cycle Use	Initial Charging Current Less than 45A Voltage 7.2-7.45V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	289.6	184.4	136.1	125.0	79.3	55.7	37.9	25.0	22.3	12.15	2.70
1.65V	284.3	181.0	133.7	122.7	77.9	54.7	37.2	24.5	21.9	11.93	2.65
1.70V	279.0	177.7	131.2	120.4	76.4	53.7	36.5	24.1	21.5	11.7	2.60
1.75V	273.8	174.3	128.7	118.2	75.0	52.7	35.8	23.6	21.1	11.48	2.55
1.80V	263.3	167.6	123.8	113.6	72.1	50.6	34.4	22.7	20.3	11.25	2.50

Discharge Constant Power per Cell (Watts at 25°C)







F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	557.4	354.9	262.0	240.6	152.7	107.2	72.9	48.1	42.9	23.4	5.19
1.65V	547.3	348.5	257.3	236.2	149.9	105.2	71.6	47.2	42.1	23.0	5.10
1.70V	537.2	342.0	252.5	231.9	147.1	103.3	70.2	46.4	41.3	22.5	5.00
1.75V	527.0	335.6	247.7	227.5	144.4	101.4	68.9	45.5	40.5	22.1	4.90
1.80V	506.8	322.7	238.2	218.7	138.8	97.5	66.3	43.7	39.0	21.7	4.81

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **VALIANT** for the latest information.

Deep Cycle VRLA AGM Battery

VTD6-225

PERFORMANCE CHARACTERISTICS

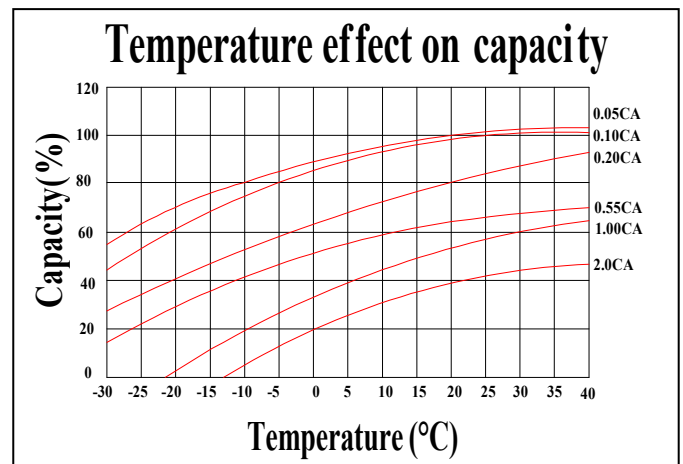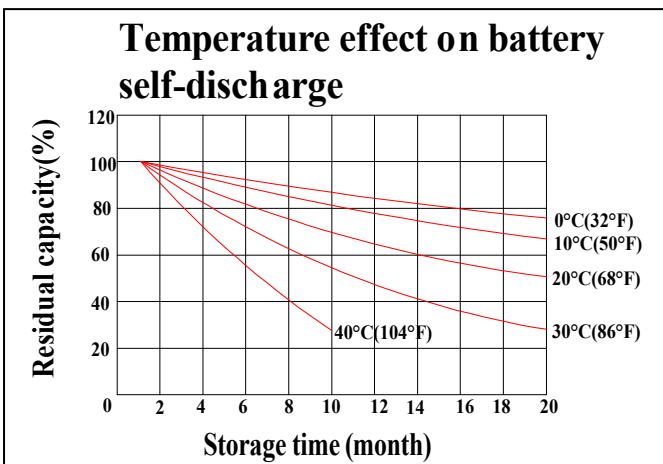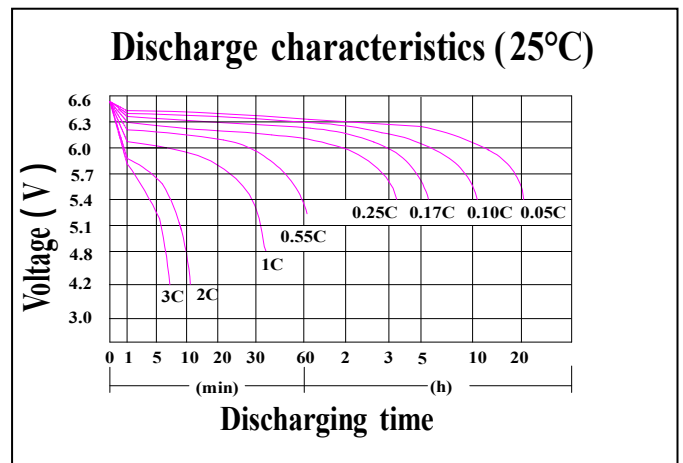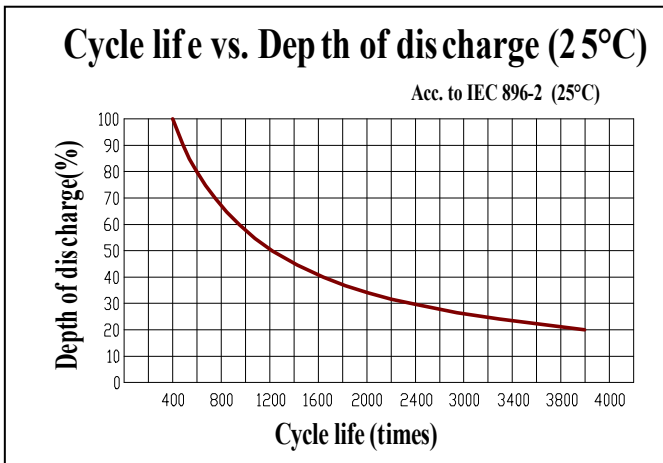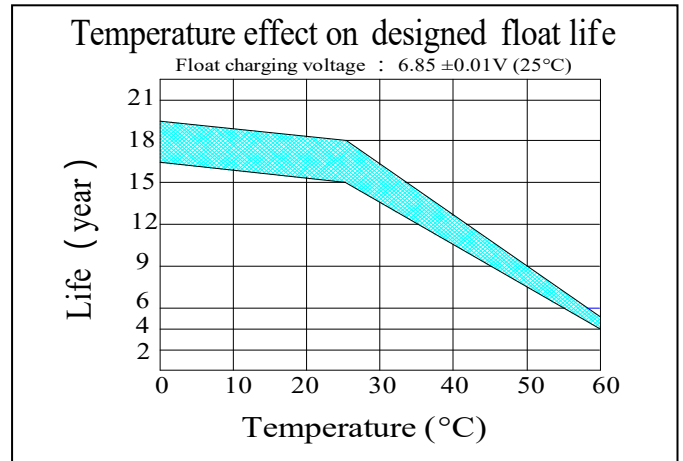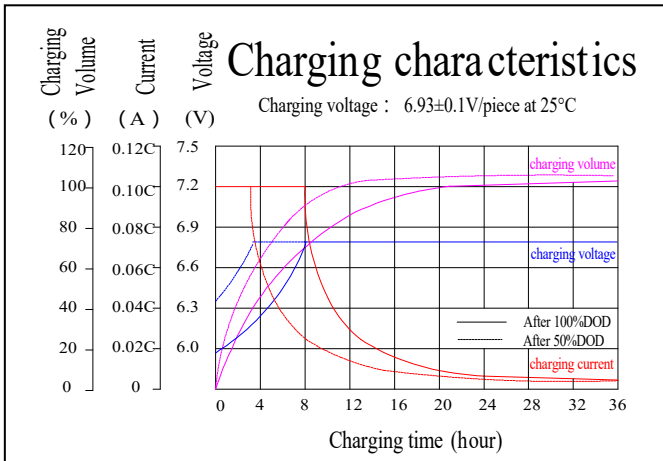

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve
Features	Thick high Sn low Ca grid with Special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistant e ABS (UL94-V0optional)	Flame Si-Rubber and aging resistance
Component	Terminal	Separator	Electrolyte	Pillar seal
Features	Female Copper Insert	Advanced PVC / AGM separator for high pressure cell desbm	Dilute high purity sulfuric acid	Two layers epoxy resin seal